

Repairs:

Repair Tips:

Zippers - Prior to opening zippers, make sure that they are clean and clear of any debris. Clean the zippers with soapy water and an old toothbrush.

Patching Materials:

Clear/Cloudy Material: The clear/cloudy PVC material (D) is to be used only to repair leaks or punctures in the seat bladders and/or the main bladders.

Black Material: The black vinyl material (C) is to be used only to repair punctures or tears in the bottom of the kayak.

Orange Material: The orange polyester material (A) is to be used only to repair punctures or tears in the hull of the kayak.

Clear/ Material: The clear PVC material (B) is to be used only to repair leaks or punctures in the Sec-Through Viewing panels on the bottom of the kayak.

Glue Patching Instructions:

1) Locate the hole in the hull or bladder.

2) Obtain good access to the hole area. To access the bladder, open the zipper and pull out the bladder far enough to allow you to work on the damaged area.

3) Cut a patch of fabric at least 2" larger in both length and width than the puncture, tear or hole.

4) Clean the area to be patched.

5) Rough up both the patch and the area to be patched with the sand paper.

6) Apply an even coat of glue with a small brush to both the patch and the area to be repaired and then place the patch onto the area to be repaired. Apply light pressure to the patch for 10 to 15 minutes.

7) Allow glue to dry for a minimum of 2 hours before inflating kayak. Overnight curing is recommended.

Extensive Repairs:

If you have a major tear or rip in any of your bladders that are beyond your ability to repair, please contact Solutions For Sports at 805-899-1710 or at www.solutions-for-sports.com for a replacement bladder.

Warranty:

This product is warranted for major defects in materials and workmanship only for a period of 3 months from the date of purchase for the original owner for non-commercial use. Solutions For Sports reserves the right to determine whether to repair or replace any product covered by this warranty and the right to replace any discontinued models with current models when necessary. Colors may vary between original and replacement parts.

FOR SPORTS, INC. 17000 S. HUNTERS TRAIL, SUITE 100, VAN NUYS, CA 91411
TEL: 805-899-1710 FAX: 805-899-1711

Solutions for Sports - Conquest Kayaks™ Set

• ALWAYS WEAR A GOVERNMENT APPROVED FLATION DEVICE

• DO NOT USE TO SURF WAVES OR IN WHITE WATER

• KNOW THE LIMITS OF YOUR ABILITY AND THE LIMITS OF YOUR EQUIPMENT

The Conquest Kayaks™ Kayak set includes:



- 1 - Conquest 2 men Kayak
- 2 - 220cm Dura Flex Paddles (not included in some sets)
- 2 - Easy Adjusting Seats
- 1 - Foot Pump (not included in some sets)
- 1 - Mesh Carry/Storage Bag
- 1 - Kayak Pail

Kayak Inflation

1) Spread out the deflated kayak on a clean flat surface free of sharp points.

2) Inflate the two (2) seat cushion bladders. Connect the Boston Valve Adapter (Item #1) in Kayak Flat to the pump hose. Thrip the cushion covers to access the vinyl valves built into the seat bladders. Insert the pointed end of the Boston Valve Adapter into the vinyl valve and inflate the seat bladder to no more than 1.0 psi. Note: If the main kayak bladders are inflated before the seat bladders it may be difficult to properly inflate the seat bladders.

3) Inflate the two (2) main bladders in the kayak. Unscrew the valve cap at the top of the Boston Valve making sure that the base of the Boston Valve is securely tightened to the bladder. Detach the pointed end from the Boston Valve Adapter and insert the Boston Valve Adapter into the Boston Valve. Inflate the main bladders to no more than 1.5 psi.

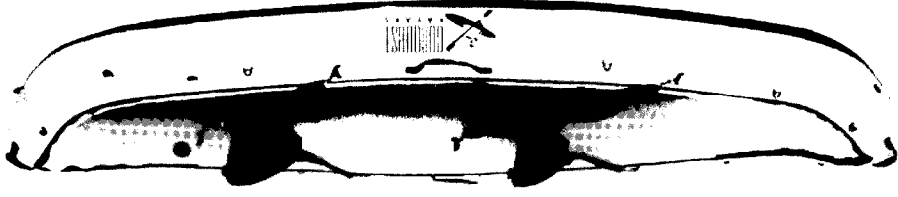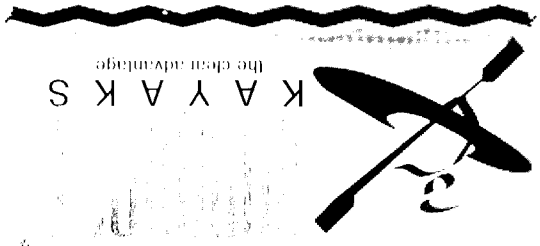

Kayak Deflation:

1) Deflate the seat cushions by inserting the pointed end of the Boston Valve Adapter into the vinyl valve. Apply pressure to the bladder until it is completely empty. Close the zipper.

2) Deflate the main kayak bladders by unscrewing the base of the Boston valve from the main bladders. (Once all air is out of the main bladders, screw the base of the Boston valve back into a secure position.

CAUTION:

Increases in air temperature and elevation could cause the air inside the kayak to expand which would cause the bladders to burst. Always release some air when these conditions occur.

Never leave your kayak sitting in direct sunlight when it is out of the water.

Do not tow the kayak behind any boat.

Seat Installation:

1) The bottom of each seat has two (2) Velcro strips sewn into them. Center these Velcro strips directly onto the mating Velcro strips on top of the seat cushion bladder cover. Test to make sure that you have a good mating of the opposing pieces of Velcro and that the seat is properly aligned to the kayak.

2) For each seat, attach the four (4) seat straps to the four (4) seat anchor attachments on the hull of the kayak.

3) Adjust the seat straps to maximize personal comfort.

Paddle Assembly:

1) Each of the two (2) paddles features a take apart fiberglass shaft. To assemble, insert the male end of the paddle into the female end until the button clicks into place.

2) Each paddle offers 3-position ferrule adjustment (right hand, left hand and unlatched). Once on the water, find the blade position that is most comfortable for you to paddle with by simply depressing the button and rotating the shaft to the desired position.

Paddles should be disassembled into 2 pieces during transportation.

More kayaks are damaged in transport than on the water. To avoid excessive wear and to extend the life of this kayak, transport this kayak in the mesh storage bag. Do not load other equipment, particularly heavy or sharp objects, on top of the kayak.

Transporting:

Cleaning and Maintenance:

Your inflatable kayak is constructed with high quality materials and superior workmanship. However, as with all marine equipment, proper cleaning and maintenance will extend the use of the product and allow it to perform better. Most damaging to your kayak are: extended UV exposure, insect repellents, mold and mildew. To keep your kayak performing its best, please follow the following these basic instructions:

- Do not set or store your kayak on sharp objects
- Do not over inflate
- Keep zippers clean
- Clean with soap and water
- Allow the boat to drain properly so it can be stored dry
- Do not tow

Storage:

Short Term Storage - Allow to air dry, deflate and roll-up loosely

Long Term Storage - After use, rinse off all debris with fresh water and allow the kayak to air dry on soft pressure out of direct sunlight. Once dry, close all valves, fold up the kayak and place in the mesh carry/storage bag. Store in a cool, dry place out of direct sunlight and away from any sharp objects

The Repair Kit includes:

- A) 1-6" x 6" Polyester Material (Orange)
- B) 1-6" x 6" PVC Material (Clear)
- C) 1-6" x 6" Vinyl Material (Black)
- D) 1-6" x 6" PVC Material (Clear/Cloudy)
- E) 1-Boston Valve Adapter (2 sections)
- F) 1-Piece of sandpaper
- G) 1- 1/4 oz glue tube

